

Solarline string combiner box

SOL-SC-2ST-0-DC-3MPPT-2005SE

Order-No. 1197147

Data sheet
109515_en_00

© PHOENIX CONTACT 2020-03-19

1 Description

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. Their functions include collecting and protecting strings and, if necessary, separating the panels from the rest of the system by means of a fire service or switch disconnectors.

2 Features

String combiner box for photovoltaic systems up to 1000V DC for the connection of 3 x 2 strings.

With surge protection (type 2) and cable glands for the input and output side.

3 Technical data

System parameter	
System voltage	1000 V DC (U_{max})
Number of string inputs	2 (per MPP tracker)
Current per string	20.5 A (I_{max})
Number of outputs	1 (per MPP tracker)
Number of supported MPP trackers	3
Safety equipment	
Surge protective device	T2
Protection level U_p	≤ 3.7 kV
Total discharge current I_{total} (8/20) μ s	40 kA
Cable entry	
Type of cable entry	Cable gland
Cable cross section string input	4 mm ² ... 6 mm ²
Sealing area string input	5 mm ... 10 mm
Cable cross section output	4 mm ² ... 16 mm ²
Sealing area output	M16 cable gland: 5 mm ... 10 mm M20 cable gland: 6 mm ... 12 mm
Cable cross section grounding	16 mm ² (2 x)
Sealing area grounding	6 mm ... 12 mm (2 x)
General data	
Housing material	Polycarbonate
Material cover/door	Polycarbonate (transparent)
Degree of protection	IP65
Protection class	II
Dimensions	
Width	361
Height	254
Depth	111
Note on dimensions	Housing dimensions
Ambient conditions	
Ambient temperature (operation)	-20°C ... 55°C

4 Documentation

Type/description	Designation	Order No.
Package Slip for SOL-SC-xST-0-ACDC-xMPPT-xxx0	PACKB SOL-SC-xST-0-AC/DC-xMPPT-xxx0	107714



Important: Read the instruction manual carefully before mounting, installing, and starting up the Solarline string combiner box. Pay particular attention to the safety notes in this document.



For additional information about the Solarline products, visit phoenixcontact.com.


5 Drawings




Connection of the protective grounding conductor




Connection of the protective equipotential bonding conductor




Connection of the PV strings, as well as connection to the inverter



Connection of the remote indication contact on the surge protection

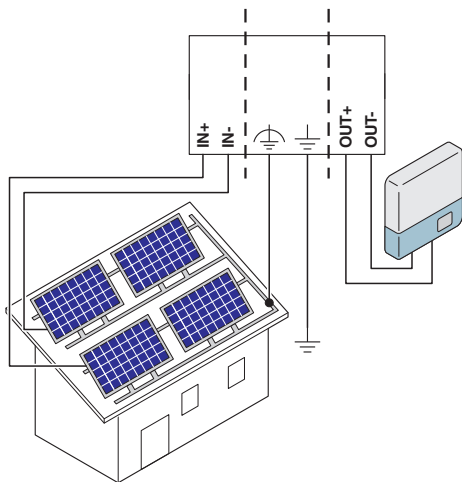

Schematic application drawing

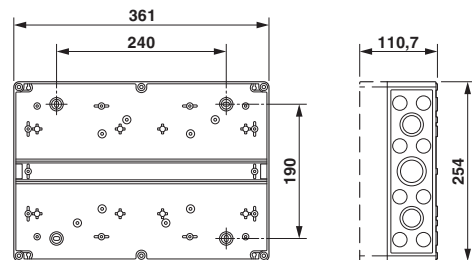

Housing dimensions